

HOT MIX ASPHALT


IL Route 2
North of Latham Road to Harlem Road
Rockford, Illinois

CLIENT / CONTACT

William Charles Construction
5290 Nimitz Road
Loves Park, Illinois

OWNER

Illinois Department of Transportation (IDOT)

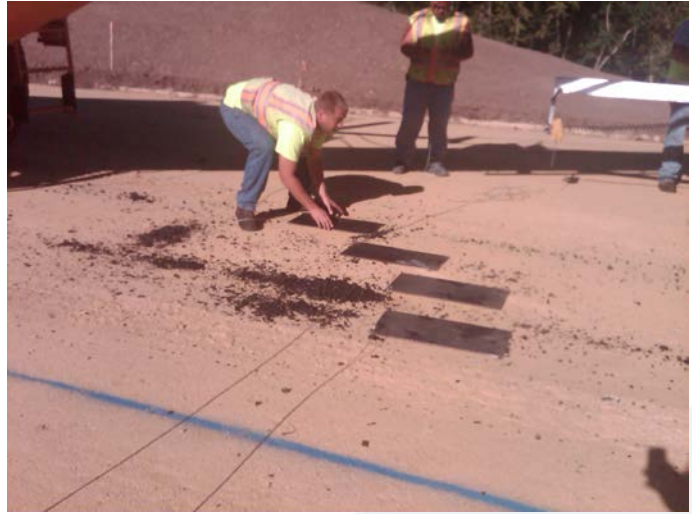

GEOCON provided technical assistance and personnel to perform Quality Control Management of the IL Route 2 reconstruction project during the 2013 phase of this project. This phase of the project consisted of the reconstruction of a 3-mile section of four lane road with a 12" full depth Hot-Mix-Asphalt (HMA) pavement, between 0.5 miles north of Latham Road to Harlem Road in Rockford, Illinois. This project was an Illinois Department of Transportation (IDOT) Pay For Performance (PFP) project and was IDOT's first ever Full Depth HMA PFP project. Our IDOT certified personnel partnered with our client's plant crew, paving crew and QC staff to provide guidance, coordination and technical assistance, overseeing field sampling and lab testing of the HMA mixtures and the compaction efforts of the HMA paving. GEOCON reviewed and reported all test results to IDOT's materials inspection personnel.

